
Specifications

Features

- Very low power consumption
- Protection against load short-circuit & overload
- Reliable -100% solid state
- No radio interference
- Encapsulated in epoxy potting
- 5 year warranty
- Manufactured with solar power
- Designed and built in North America

Model L5

Electrical Specifications

Voltage configurations 10V to 50V avail.

Max. input voltage 60 volts

Max. current (at 50 °C) 5 amps DC

Power Consumption

Standby - 0.2 mA, ON - 2.3 mA

16 gauge wire leads

Typical set points: Off: 13.0 Volts On: 12.0 Volts Off

60 seconds at or beyond setpoint

(other voltage setpoints and time delays available.)

General Specifications

Temperature range: -40° to +50°C (-40° to +160°F)

Case: ABS, sealed in epoxy

Weight: 100 grams, 3.5 oz.

Size (H x W x D): 5.1 x 5.1 x 3.8 cm (2 x 2 x 1.5 ")

Mounting: wall mountable

Options

Custom wire length, voltage setpoints and time delays, built in load snubbing diode, adjustable setpoint or time delay with screw driver on back.

Warranty

Full 5-Year Warranty

Warranted in entirety, except abuse, within a period of 5 years following the date of purchase. In the event a defect develops during the warranty period, return the unit to eco energy, postage paid. Eco energy will repair or replace the product with a new or reconditioned unit of equivalent quality.

Eco Energy

Since 1992, Eco Energy has been in the business of designing and manufacturing solar charge controllers, battery chargers, low voltage disconnects, current boosters DC converters and battery voltage monitors.

Eco Energy controls are currently used in power systems for remote homes and cottages, recreational vehicles, boats, telecommunication and navigational systems, natural gas pipeline operations and other solar battery charging applications around the world.

Eco Energy is powered by solar power.



57 Alexander Street
Belleville Ontario
Canada K8N 2H4
Phone: 613 962-9889

Email: info@eco-energy.ca

www.eco-energy.us
www.eco-energy.ca

Printed Jan. 2018

Installation Guide

Low Voltage Disconnect

5 Amp Battery Discharge Protection



Advanced Control Solutions


Load Control 5 Amp L5

Normal Operation

The voltage switch protects your batteries from being excessively discharged. The input voltage is constantly monitored with an extremely efficient low power draw design.

When the input voltage is at or above the ON setpoint (typically 13.0 volts) for 60 seconds the load will be turned on.

When the input voltage is at or below the OFF setpoint (typically 12.0 volts) for 60 seconds the load is turned off to protect the battery from being discharged excessively.

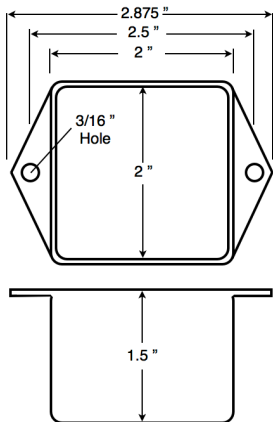

- WARNING -

DO NOT EXCEED A LOAD OF 5 AMPS
A Load > 5 Amps can damage the control

Installation

Location


The controller needs to be in a cool location in order to function properly. It should not be in direct sunlight, or mounted in a hot location such as in direct sunlight. The controller should be installed near the batteries, to ensure an accurate battery voltage measurement. The distance from the batteries or input power to the controller should not exceed 40 feet.

Wiring

- WARNING -

DO NOT REVERSE INPUT POLARITY
Reverse input polarity may damage the control

#18 AWG or larger wire must be used.
The positive wires are Red. The negative wires are Black (both black wires are connected together inside the control). A relay can be installed directly on the output wires to increase the current or voltage capabilities.

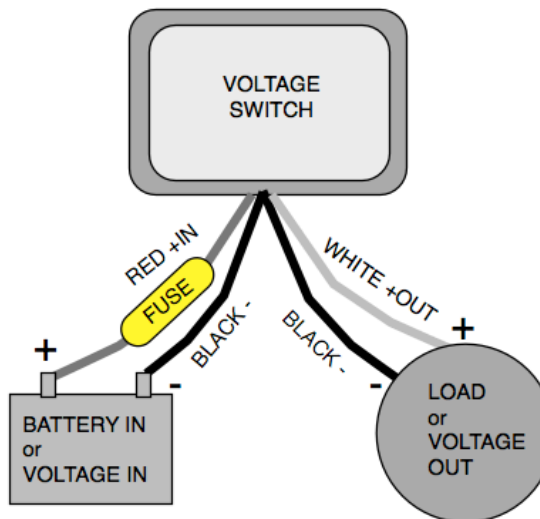

Operation

- WARNING -

MOTORS & COILS PRODUCE VOLTAGE SPIKES
A large voltage spike will damage the control

A motor, pump or other inductive load on the battery input to the control will briefly turn into a generator when turning off. This will cause a large negative voltage spike. A diode, or voltage snubber is required on the motor, pump or relay to prevent large voltage spikes into the control.

Fault Conditions

Loads such as DC motors, and incandescent lights can have large starting currents as much as 10 times the running current. A high current may trigger the overcurrent protection and turn off the load.

After an over current fault the output will remain off until reset.

To reset the control after a short circuit or overload, to turn off power to the input.

The load will also be turned off when the control is too hot, however it will automatically turn back on when cooled sufficiently.

Indicator Light

1 Flash - The voltage reached the low setpoint. This flash will continue until the voltage reaches the high setpoint.
2 Flashes - The load is turned off.